


KONZOLNA

UNUTRAŠNJA JEDINICA

Konzolna unutrašnja jedinica predstavlja pouzdano rješenje za prostore u kojima je grijanje prioritet. Postavljena pri dnu zida, omogućava efikasnu distribuciju toplog vazduha i posebno je pogodna za prostorije sa nižim parapetima, većim staklenim površinama i potkrovljima, gdje klasična zidna jedinica nije optimalna.

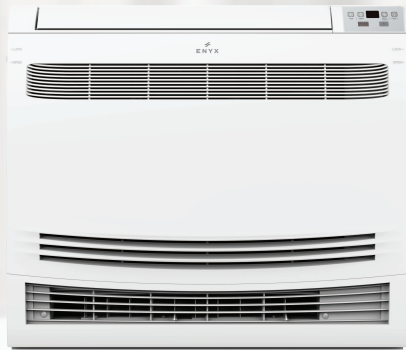

MODEL		ENYX PRIME CONSOLE			
		IDU 9k WiFi R32	IDU 12k WiFi R32	IDU 18k WiFi R32	
	Tip upravljanja	Daljinski upravljač			
	Kapacitet hlađenja	Btu/h	9000	12000	18000
	Kapacitet grijanja	Btu/h	9500	13500	19600
	Pritisak	Visoki (DP)	MPa	3.7	3.7
		Niski (SP)	MPa	1.2	1.2
	Nivo zvučne snage (max/min)		dB(A)	52/37	56/38
	Nivo zvučnog pritiska (max/min)		dB(A)	44/27	46/28
	Električni podaci				
	Napajanje		220-240V~/50HZ	220-240V~/50HZ	220-240V~/50HZ
	Opseg napona	V	165~265	165~265	165~265
	Struja	Hlađenje	A	0.15	0.21
		Grijanje	A	0.15	0.21
	Power input	Hlađenje	W	35	48
		Grijanje	W	35	48
	Ventilatorski sistem				
	Protok vazduha	m3/h	650	650	800
	Izmjenjivač toplote				
	Broj redova	/	2	2	2
	Spoljašnji prečnik cijevi	mm	5	5	5
	Razmak lamela	mm	1.2	1.2	1.2
	Razmak cijevi (a) x razmak redova (b)	mm	19.5x11.6	19.5x11.6	19.5x11.6
	Povezivanje				
	Priključak rashladnog sredstva				
	Priključna cijev	Tečna faza	Inches	1/4"	1/4"
		Gasna faza	Inches	3/8"	3/8"
		Maksimalna dužina za svaku unutrašnju jedinicu	m	25m	25m
		Maksimalna visinska razlika	m	15m	15m
		Standardna dužina cjevovoda (fabričko punjenje)	m	5m	5m
		Dodatno punjenje rashladnog sredstva	g/m	15g/m	15g/m
	Ostalo				
	Neto dimenzije (Š x V x D)	mm	700×600×215	700×600×215	700×600×215
	Neto težina	kg	14.5	14.5	14.5
	Dimenzije pakovanja (Š x V x D)	mm	775×725×280	775×725×280	775×725×280
	Bruto težina	kg	16.5	16.5	16.5
	Funkcionalnosti	WiFi upravljanje	Da	Da	Da